


DIH-15

Inspection Hood

Innovative Designs



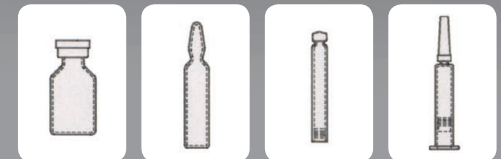

Main Technical Features

DIH-15 Data Sheet:

Technical Details

— Overhead lighting

- Isotropic diffused 14" fluorescent style LED light.
- Whiter, brighter light with better stability than high frequency ballast T2 Fluorescent tubes.
- Black Anodized finish.
- About 3 times brighter than Fluorescent tubes.
- Independent on/off switch
- Operating temperature - 120 degrees F
- Current consumption = 0.8amps
- Illuminance - 165,000 Lux
- Lifetime hours - 75,000 hours.
- Intensity Control
- Low Voltage 24V Operation.
- CE Compliant.

— Main Hood body

- 24" W x 22" H x 9" D inches
- Ergonomic Inspection Hood
- Inspection hood side panels
- Swivel up base
- Padded Arm rest
- Aluminum Black FDA approved Powder coating
- Ergonomic carrying handle

— Inspection

- Large Black and White inspection backgrounds

— Optional Accessories

- 2.5 X Magnification lens with integrated light, adjustable arm and assembly



1555 Commerce Drive, Bourbonnais, IL 60914 USA
Tel: 815-939-0580 Fax: 815-939-7798

www.dabrico.com sales@dabrico.com

Specification subject to change without notice.
All rights reserved. The copying of technical data and images is forbidden. © Copyright Dabrico, Inc.

The information given on this data sheet is accurate as for the date of issue. Nothing herein shall be deemed to constitute a warranty, explicitly or implicitly. It is the user's responsibility to determine the applicability and suitability of such material to any particular purpose.